


TORRENT®

B O I L E R S



b. Technical Data and Dimensions

Series / Types	MRX 5	MRX 6	MRX 7	MRX 8	MRX 9	MRX 10
Elements	5	6	7	8	9	10
Nominal Power Output (Kcal/h)	129.403	165.013	198.283	229.496	260.019	290.046
Nominal Power Output (KW)	150,5	191,9	230,6	266,9	302,4	337,3
Input Power (Kcal/h)	144.423	184.578	222.291	257.283	291.501	325.164
Input Power (KW)	167,96	214,65	258,52	299,22	338,99	378,17
Efficiency (%)	89,60	89,40	89,20	89,20	89,20	89,20
Oil Consumption (kg/h)	14,177	18,119	21,821	25,256	28,615	31,918
Natural Gas Consumption (m ³ /h)	16,79	21,46	25,85	29,92	33,90	37,81
Combustion Chamber Pressure (mmH ₂ O)	12,0	21,0	27,0	28,0	29,0	29,0
Combustion Chamber Pressure (mbar)	1,3	2,1	2,7	2,8	2,9	2,9
Water Capacity (lt)	67,0	80,0	93,0	106,0	119,0	132,0
Weight (Kg)	529	610	683	760	834	907
Hot/Cold Water Pipe Diameter (inch)	2 1/2"					
Exhaust Pipe (mm)	250	250	250	250	250	250

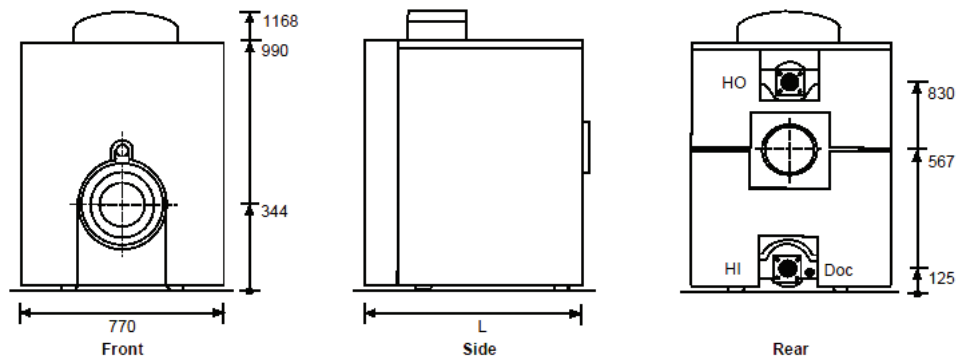

Series / Types	MRX 5	MRX 6	MRX 7	MRX 8	MRX 9	MRX 10
Jacket Length L (mm)	925	1055	1185	1315	1445	1575
Flue Gas Exit Diameter F (mm)	250	250	250	250	250	250