


TORRENT®

B O I L E R S



b. Technical Data and Dimensions

Series / Types	GLX 3	GLX 4	GLX 5	GLX 6	GLX 7	GLX 8
Elements	3	4	5	6	7	8
Nominal Power Output (Kcal/h)	38.467	50.498	62.485	74.591	91.178	107.902
Nominal Power Output (KW)	44,76	58,73	72,67	86,75	106,04	125,49
Input Power (Kcal/h)	43.673	57.303	70.998	84.024	103.014	121.049
Input Power (KW)	50,82	66,64	82,57	97,72	119,81	140,78
Efficiency (%)	88,08	88,13	88,01	88,78	88,51	89,14
Oil Consumption (kg/h)	4,298	5,634	6,946	8,262	10,079	11,902
Natural Gas Consumption (m ³ /h)	5,08	6,66	8,21	9,77	11,91	14,08
Combustion Chamber Pressure (mmH ₂ O)	4,5	6,5	6,7	6,7	8,2	12,7
Flue Gas ΔT (Water temperature 80°C)	216	218	214	219	216	216
Water Capacity (lt)	17,0	23,0	29,0	35,0	41,0	47,0
Weight (Kg)	172	212	249	290	330	369
Hot/Cold Water Pipe Diameter (inch)	1 1/2"					
Exhaust Pipe (mm)	150	150	150	180	180	180

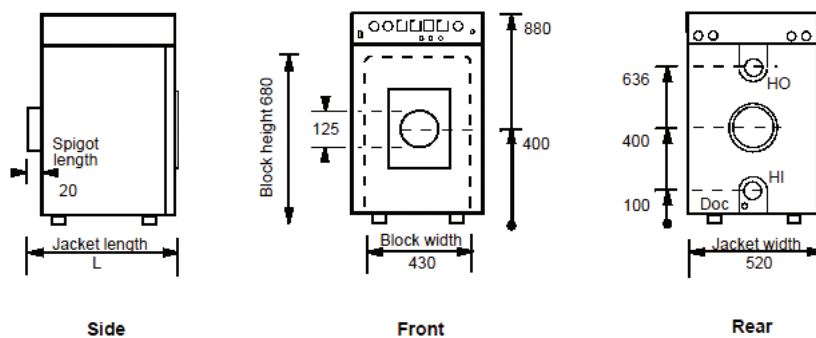

Series / Types	GLX 3	GLX 4	GLX 5	GLX 6	GLX 7	GLX 8
Jacket Length L (mm)	540	661	782	903	1024	1145
Flue Gas Exit Diameter F (mm)	150	150	150	180	180	180